



| Balance 310 |

Affordable. Fanless. Fast.

TAA 
COMPLIANT

Dual-WAN, Reliable Routing Performance



Equipped with dual 2.5G Ethernet WAN ports, the router supports high-speed internet services and provides the headroom to deliver 4Gbps of routing performance, offering reliable performance at an accessible price point.



Gigabit SpeedFusion Throughput

Elevated SpeedFusion throughput guarantees superior bonding performance, unlocking the bandwidth needed for high-demand applications.

Antenna MAX

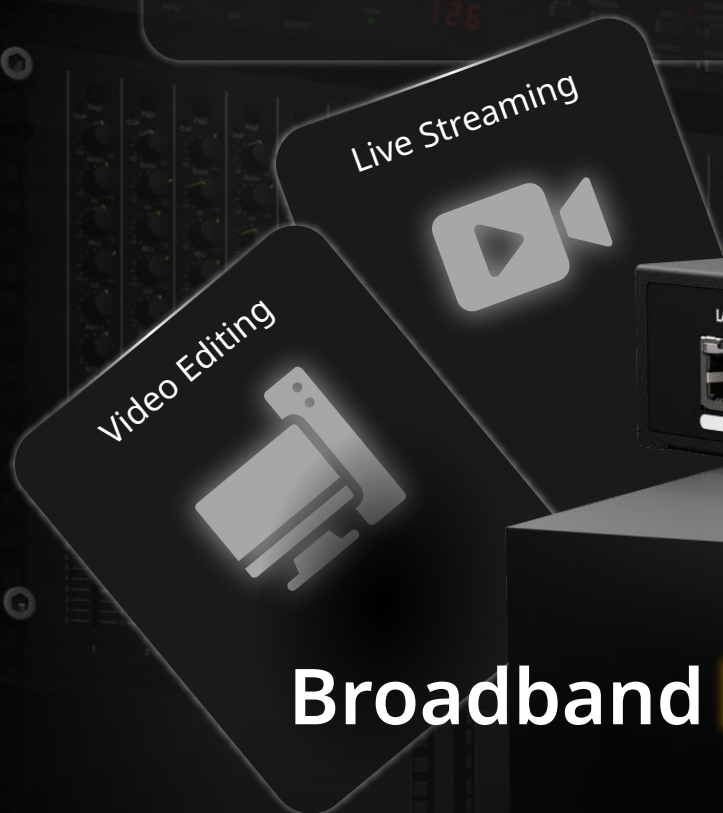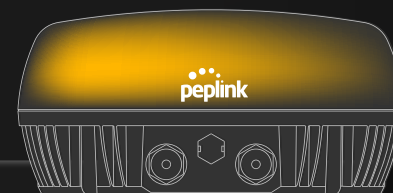

Broadband |

| 5G

| SPEEDFUSION |

5G

Broadband + 5G




Broadband

Bonded Bandwidth


Fast, Flexible Networks with 5G and Starlink



The Balance 310 can easily power and connect a 5G Dome or Antenna MAX via its built-in PoE+ WAN port, while adding Starlink as a high-speed WAN connection. By combining both, it creates a reliable, flexible business network that's quick to deploy and easy to manage.

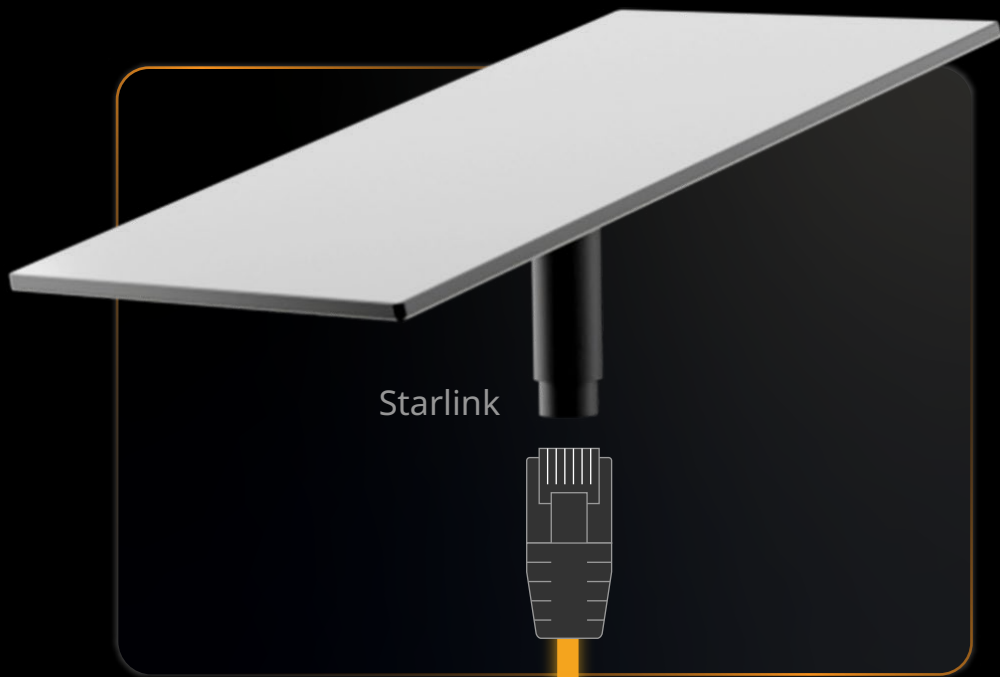

Starlink

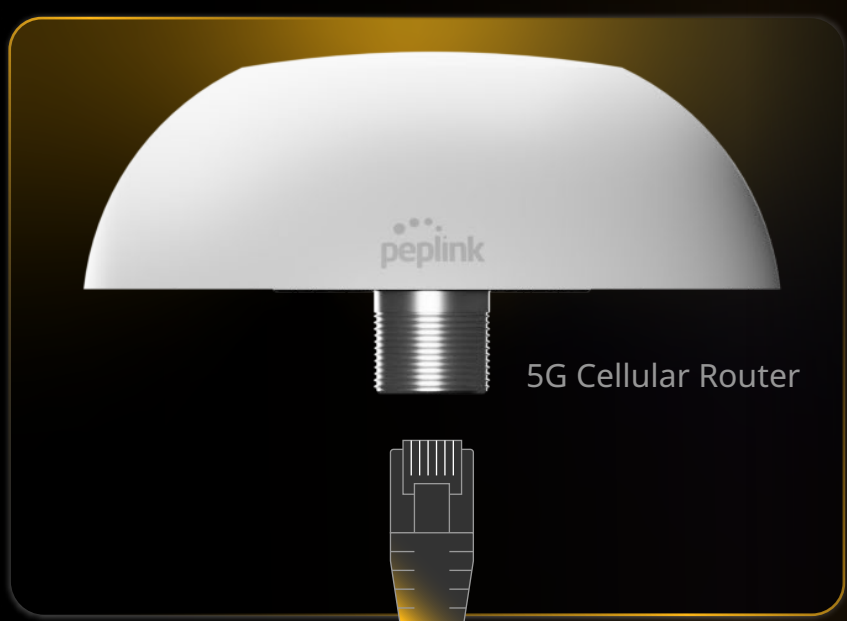


peplink

5G Cellular Router

Add **Starlink** as a high-speed WAN connection

Add **5G** through **Peplink HD1 Dome Pro**

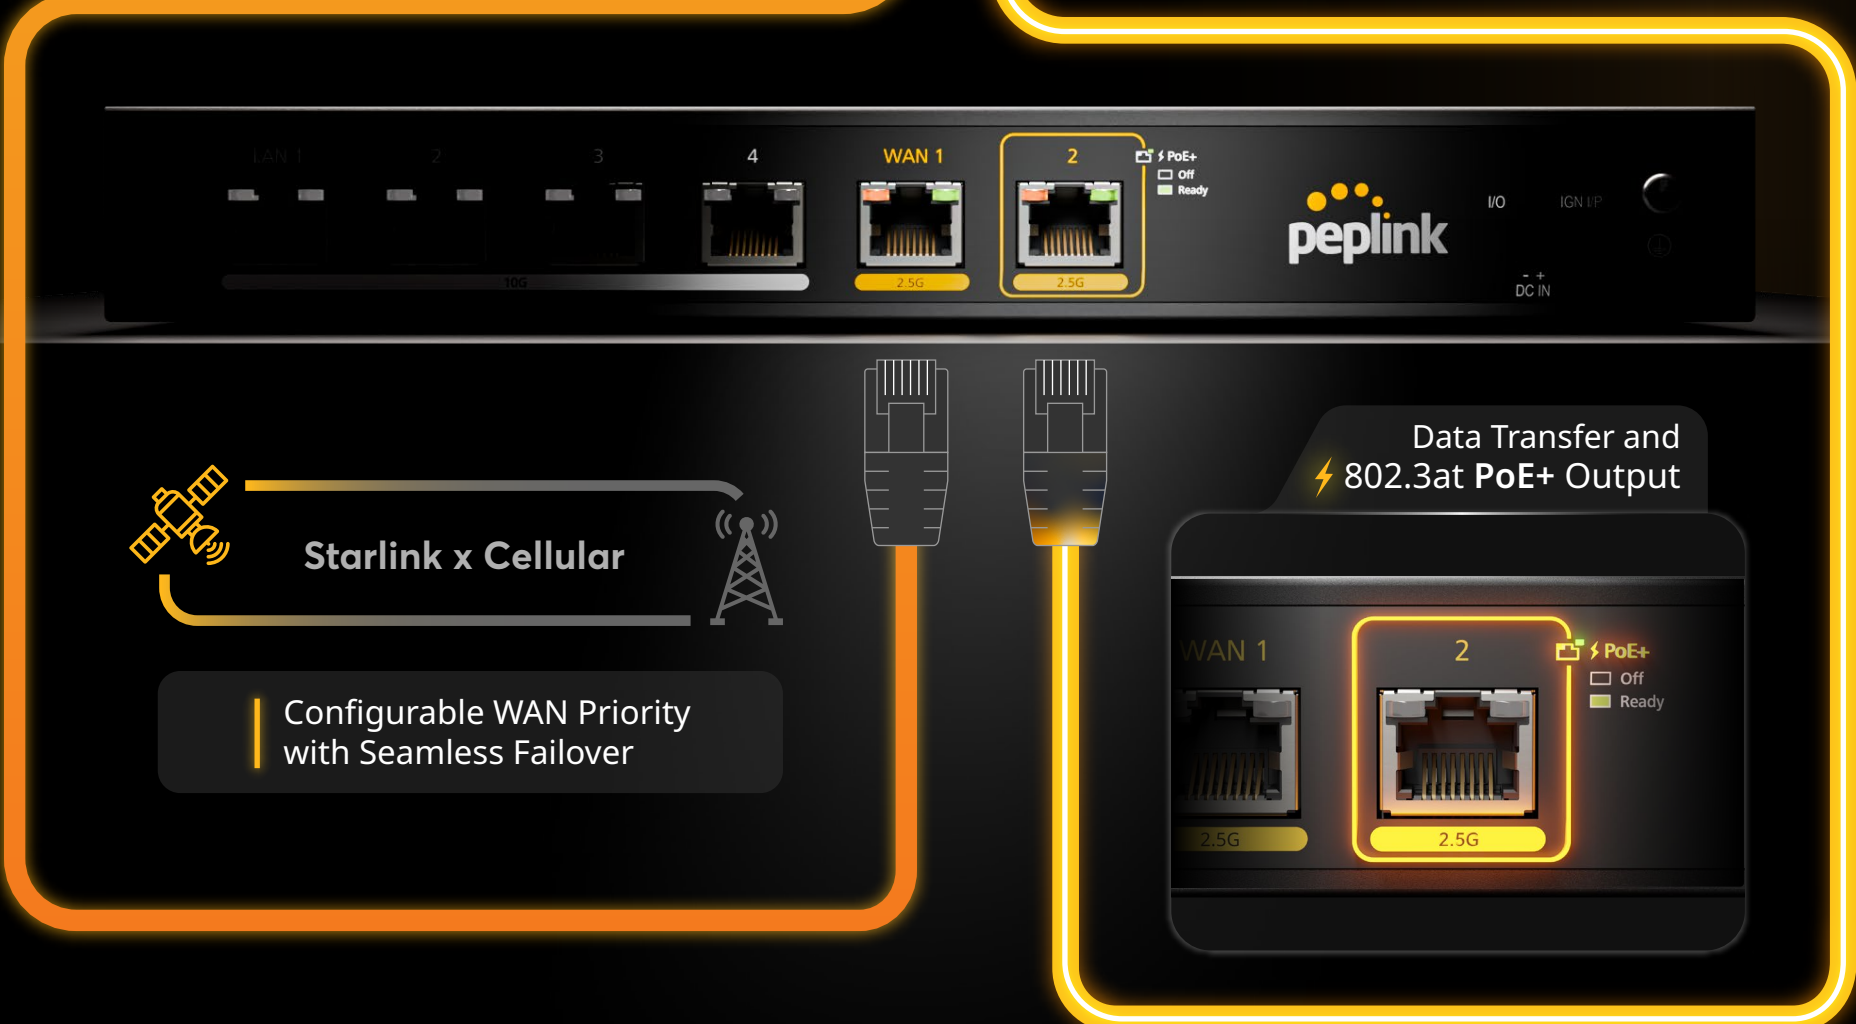

Starlink x Cellular

Configurable WAN Priority with Seamless Failover

Data Transfer and 802.3at PoE+ Output

Optimized for AV

10G LAN ports enable real-time transfers of large project files, RAW assets, and high-definition audio and video streams between NAS devices and workstations, ensuring a stutter-free experience for professional media teams.



Performance-Ready for IT

High-speed ports deliver fast, stable transfers between servers, virtual machines, and enterprise workloads, ensuring smooth and responsive IT operations.




High Performance in Flexible Environments


Fanless design ensures quiet, durable operation. Combined with ignition sensing, it supports high-performance deployment in versatile environments, including vehicles such as RVs.



Wiring Diagram

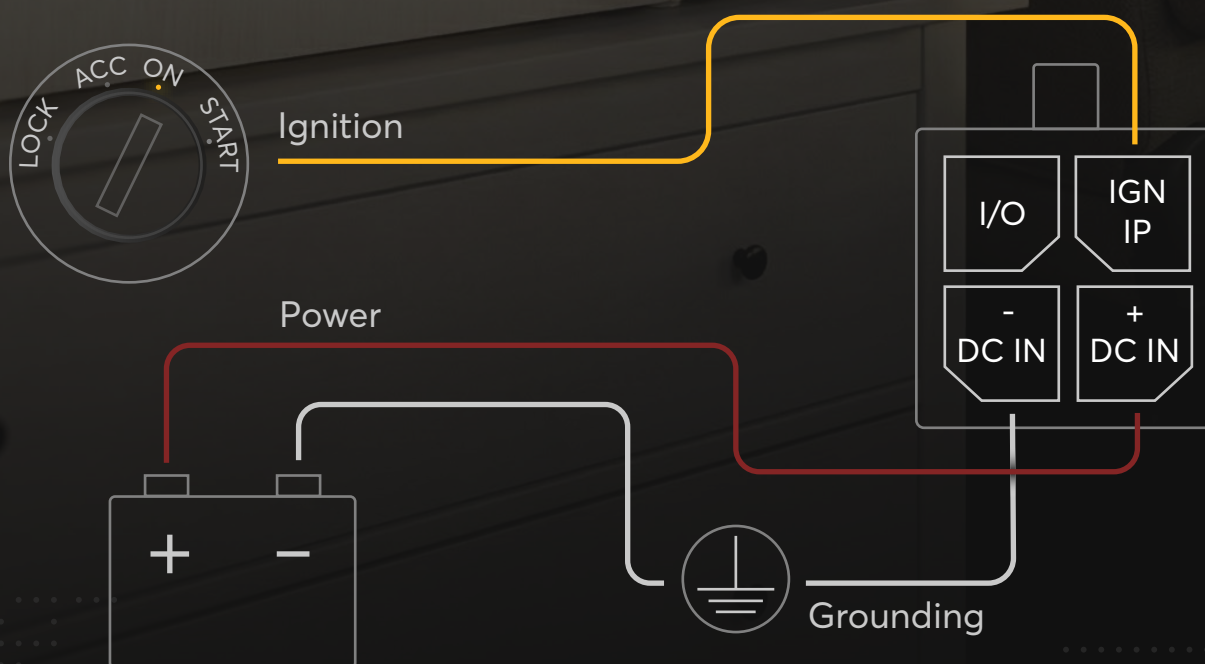

Balance 310

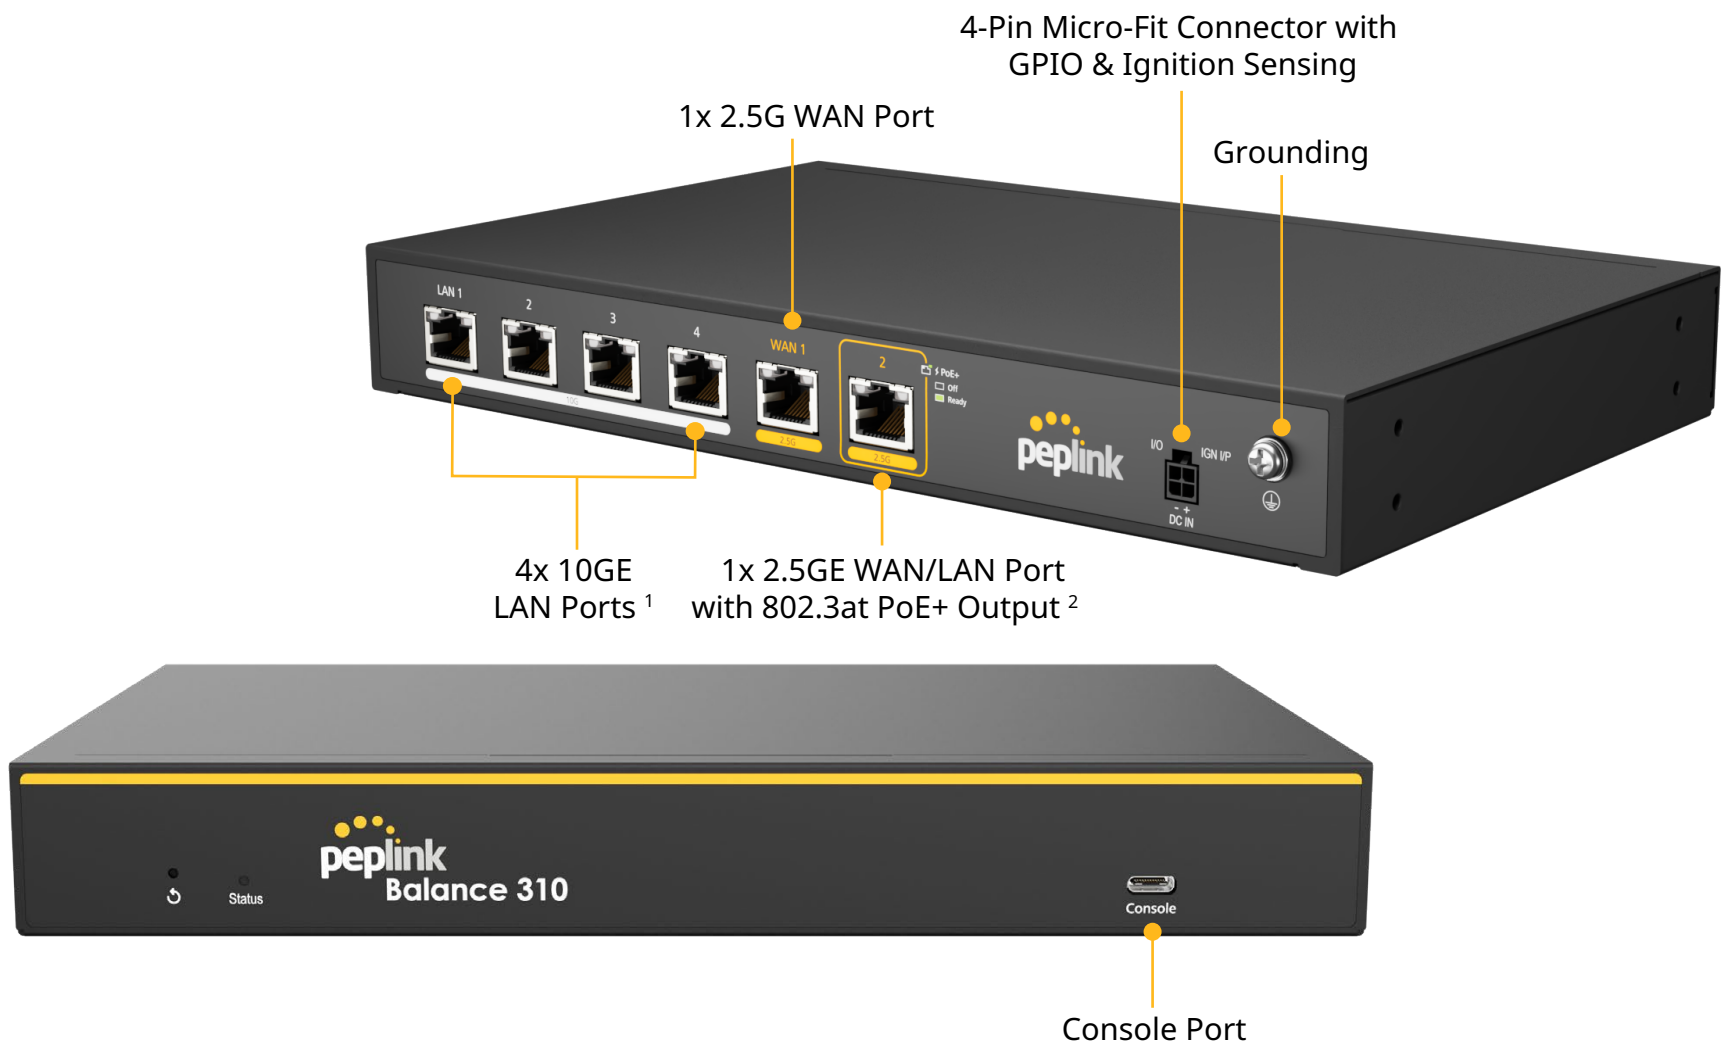

Specifications

WAN Interface	2x 2.5G Multi-Gig Ethernet ^{1 2}	Edge Computing	Docker (8GB Internal Storage)
LAN Interface	4x 10G Multi-Gig Ethernet ¹	Remote User Access	Yes
Router Throughput	4Gbps	Power Input	AC Adapter: AC Input 100V - 240V / DC Output 54V 4-Pin Micro-Fit Connector: 12V - 56V DC
SpeedFusion VPN Throughput		Power Output	1x 802.3at PoE+ ⁵
- No Encryption	1Gbps	Power Consumption	32W (nominal) / 39W (max. without PoE output)
- 256-bit AES	1Gbps	Total PoE Power Budget	30W
Recommended Users	50-500	Dimensions	10.2 x 6.3 x 1.34 inches / 260 x 160 x 34 mm
SpeedFusion VPN Peers	2 / 10 / 20 / 50 ³	Weight	2.89 pounds / 1.31 kg
Maximum Number of Controlled AP / Switch	30 / 50 ⁴	Operating Temperature	32°- 104°F / 0°- 40°C
SpeedFusion Features	Hot Failover, Smoothing, Bandwidth Bonding	Humidity	10% to 95% (non-condensing)
Central Management	InControl 2	Certifications	FCC, CE, RoHS
Drop-In Mode	Yes	Package Content	1x Balance 310 1x 54V 1.2A Power Supply Rubber Foot Pad set
High Availability	Yes	Warranty	1-Year Limited Warranty
Content Filtering	Full		
AP & Switch Controller	Yes		

¹ 10G is backward compatible with FE / GE / 2.5G / 5G ; 2.5G is backward compatible with GE and FE.

² Ethernet WAN 2 is a configurable WAN/LAN port. WAN/LAN Configuration is changeable on the Web Admin.

³ Supports 2 peers by default. Capacity increases to 10 peers with an PrimeCare. Expansion to 20 or 50 peers is available via optional software licenses (PVN-LC-20 and SFN-LC-50).

⁴ Available as a licence add-on (AP-LC-50).

⁵ A DC input voltage of 50V - 56V is required to enable PoE output.

Ordering Information

Product Code	Description
BPL-310-PRM	Balance 310

Featured Add-on

Product Code	Description
PRM-C-1Y / PCP-C-1Y	PrimeCare C / PrimeCare+ C (1-Year)
PRM-C-2Y / PCP-C-2Y	PrimeCare C / PrimeCare+ C (2-Year)
PRM-C-4Y / PCP-C-4Y	PrimeCare C / PrimeCare+ C (4-Year)
ACW-634	10ft / 3m DC Power Cable
ACW-791	Peplink 4-Pin Micro-Fit to USB-C Power Cable
ACW-992	Rack Mount Kit for Balance 310