




BR2 Pro

Designed for Pros, by Pros.



TAA
COMPLIANT



Faster, Wider, Stronger

The BR2 Pro is not just designed to be tough. Its dual 5G connections, Wi-Fi 6 and PoE input ensure an unbreakable connection in any scenario.



Peace of Mind

With so many WAN options, the BR2 Pro can seamlessly failover to guarantee your flow of data, even during the most critical circumstances. The Gigabit routing speed and serial port for OOBM allow versatility for any SD-WAN deployment.




Made for Vehicle applications

Secure your power source in mobile environments with the Molex Micro-Fit power connector. The wide input power range along with Ignition Sensing capabilities makes this a sure fit for your vehicle installs.




Effortless Cellular Extension

With the PoE input feature, the BR2 Pro can seamlessly extend your existing SD-WAN infrastructure to provide dual LTE/5G connectivity. One cable for both power and data, it's that simple.

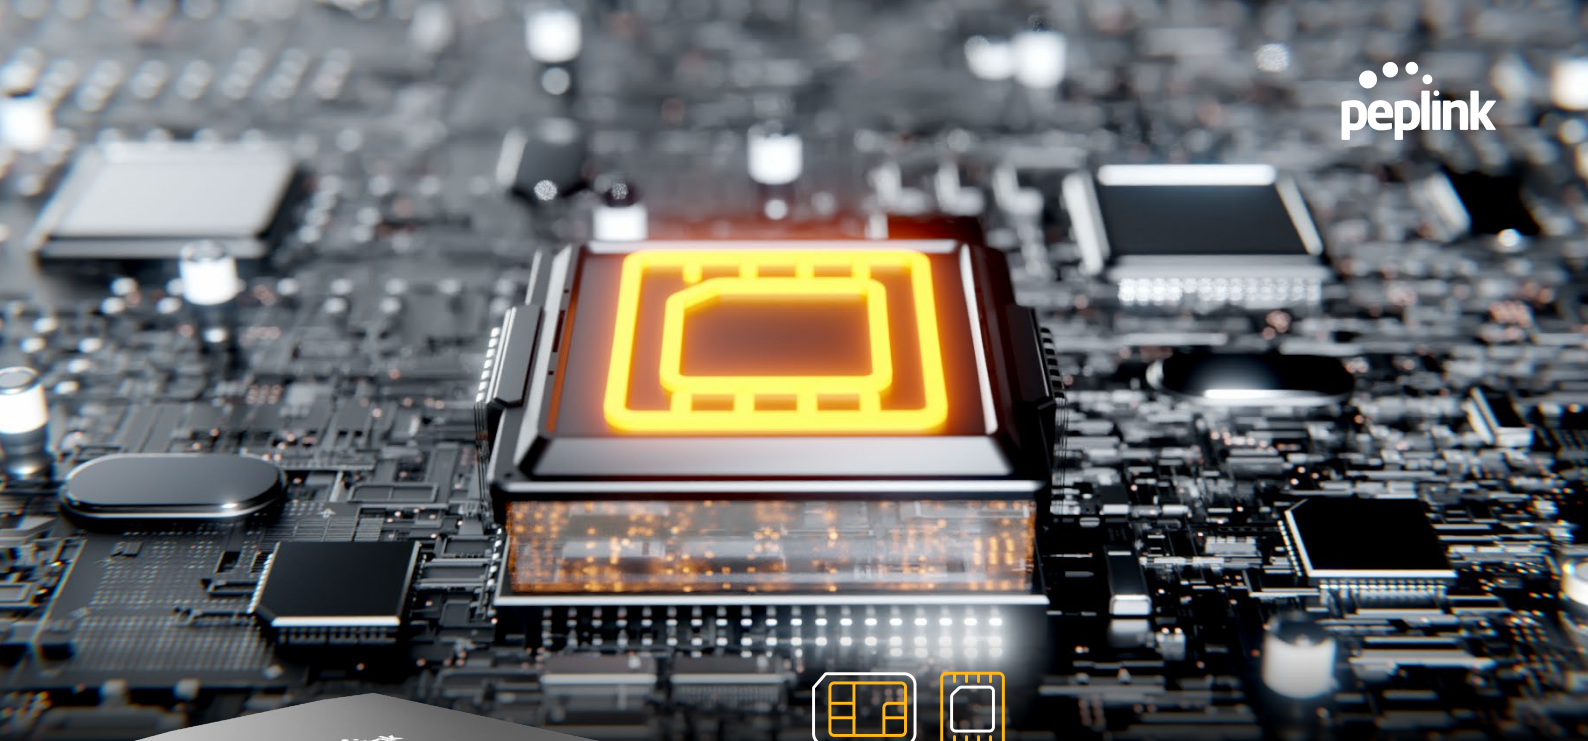

SIM-licity as always


Built-in eSIM and SIM Injector support, the BR2 Pro maximizes your possibilities with flexible remote SIM management.



Oh, So Many WANs

Complement any SD-WAN deployment with the Dual Ethernet WANs, Dual 5G/LTE, USB WAN, and Wi-Fi WAN. Not enough WANs? Add the MAX Adapter 5G for an instant third 5G connection. Literally, all the WANs to keep you going.



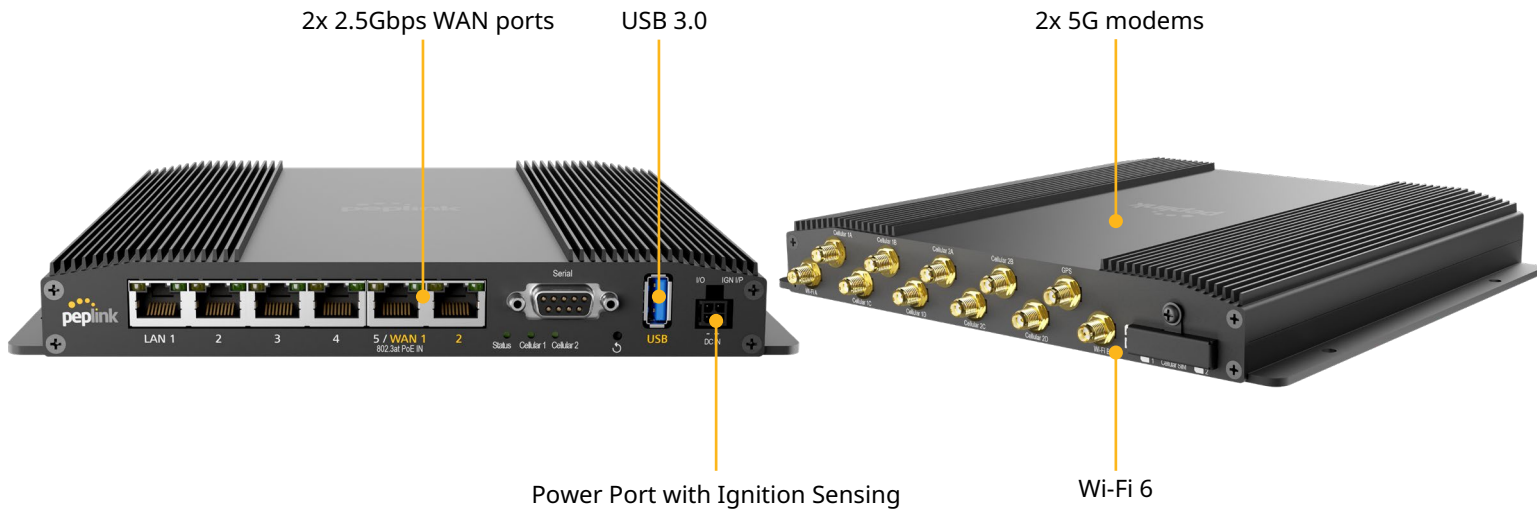

Specifications

WAN Interface	2x 10/100/1000/2500M Ethernet ¹ 2x 5G Modems with Redundant SIM Slots 1x USB 3.0 Interface	Antenna Connectors	8x SMA Cellular Antenna Connectors 2x RP-SMA Wi-Fi Antenna Connectors 1x SMA GPS Antenna Connector
LAN Interface	4x 10/100/1000M Ethernet	Power Input	AC Adapter: AC Input 100V – 240V / DC Output 12V Power Port: 10V – 30V DC Passive PoE 48-56V Power over Ethernet 802.3at ⁵
Wi-Fi Interface	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 6, 2X2 MU-MIMO Wi-Fi WAN and/or AP	Power Consumption	12W (nominal), 30W (max.)
SpeedFusion features	Hot Failover, Smoothing, Bandwidth Bonding	Dimension	8.58 x 7.68 x 1.61 inches / 218 x 195 x 29.5 mm
Number of SpeedFusion VPN Peers	2 / 5 / 10 / 20 ²	Weight	2.42 pounds / 1.1 kg
Router Throughput	1 Gbps	Operating Temperature	-40°– 149°F / -40°– 65°C
SpeedFusion VPN Throughput - No Encryption - 256-bit AES	400 Mbps 200 Mbps	Humidity	15% – 95% (non-condensing)
Recommended Users	1-150	Certifications	FCC, CE, RoHS E-Mark (Motor Vehicle) EN 61373 Shock and Vibration Resistance EN 50155 Railway Applications EN 61000 Electromagnetic Compatibility MIL-STD-810H Method 514.8 ⁶
AP Controller	Standard	Package Content	1x BR2 Pro 1x 12V3A 4-Pin Power Supply (ACW-663) 8x LTE/5G Antennas (ACW-235) 2x Dual Band Wi-Fi Antennas (ACW-341) 1x GPS Antenna (ACW-232)
Maximum Number of AP Supported	30 / 50 ³	SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles per modem) ⁷ RemoteSIM from SIM Injector ⁸ FusionSIM ⁸
Cellular Data Rate ⁴ (Downlink/Uplink)	5G: 4.1Gbps / 900Mbps CAT-20: 2Gbps / 211Mbps	Warranty	1-Year Limited Warranty
Edge Computing	Docker (8GB Internal Storage)		

¹ The WAN port can act as a LAN port if needed.

² 5 SpeedFusion VPN Peers are enabled with PrimeCare Subscription. 10 or 20 SpeedFusion VPN peers can be enabled with software license (PVN-LC-10 and PVN-LC-20).

³ Available as a licence add-on (AP-LC-50).

⁴ Theoretical maximum data rates.

⁵ 802.3at PoE port provide a power supply of 25W. If you require 30W of power budget (eg. using dual cellular WAN and USB WAN together), please empower the MAX BR2 Pro via the bundled power adapter (12V3A PSU, ACW-663), or the optional Passive PoE Injector Kit (ACW-111 + ACW-622).

⁶ MIL-STD-810H: MAX-BR2-PRO-5GN-T-PRM & MAX-BR2-PRO-5GK-T-PRM only.

⁷ Available with Firmware 8.4.0 or above.

⁸ RemoteSIM and FusionSIM compatible with hardware version 2 or above.

Ordering Information

Product Code	Regions	5G Bands	LTE Bands
MAX-BR2-PRO-5GN-T-PRM Embedded Modem(s): 2x 5G	Global* *US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet	5G (NSA & SA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70, n71, n75, n76, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71
MAX-BR2-PRO-5GD-T-PRM Embedded Modem(s): 2x 5G	Global	5G (NSA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n20, n28, n38, n41, n66, n71, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46, B48, B66, B71
MAX-BR2-PRO-5GK-T-PRM Embedded Modem(s): 2x 5G	Global* *US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet	5G (NSA & SA) Sub 6Ghz: n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n71, n75, n76, n77, n78, n79	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

Featured Add-on

Product Code	Description
PRM-E-1Y / PCP-E-1Y	PrimeCare E / PrimeCare+ E (1-Year)
PRM-E-2Y / PCP-E-2Y	PrimeCare E / PrimeCare+ E (2-Year)
PRM-E-4Y / PCP-E-4Y	PrimeCare E / PrimeCare+ E (4-Year)
ACW-634	10ft / 3m DC Power Cable
ACW-643	Vehicle Cigarette to Molex Power Cable
ACW-791	Peplink 4-Pin Micro-Fit to USB-C Power Cable
ACW-111	PoE Adapter
ACW-622	PoE+ Activation Kit
ANT-MB-42G-S-W-6	Mobility 42G - 4x4 MIMO 5G Ready Cellular and Wi-Fi Antenna System with GPS (White)
ANT-MB-42G-S-B-6	Mobility 42G - 4x4 MIMO 5G Ready Cellular and Wi-Fi Antenna System with GPS (Black)
ANT-MB-82G-S-W-6	Mobility 82G - 8x8 MIMO 5G Ready Cellular and Wi-Fi Antenna System with GPS (White)
MAX-BR1-ADV	IPsec X.509 Certificate License Key